

## The SPEECH-200:

even more powerful, with more features and easier to transport due to integrated castors. Simply set it up, connect the power supply - ready for use!

### SPEECH-200

Order No. 17.3160




#### Professional lectern with integrated wireless amplifier system

- Built-in, powerful mixing amplifier and speaker system, 75 W
- Integrated limiter
- 3 inputs via comb. jack mic (XLR)/line (6.3 mm jack), each with 3-way equalizer and gain control
- 1 stereo line input via RCA jacks with gain control
- 2 shock-absorbing XLR jacks on the top part of the lectern for 2 optional gooseneck microphones (each one uses a microphone input), with phantom power
- 1 stereo line output via RCA jacks
- 2-way speaker system
- Integrated light in the top part of the lectern
- Column with 2 document compartments and 2 storage compartments
- 2 castors

Supplied w/o gooseneck microphone. Matching microphone EMG-650P is available at option.

Matching microphone transmitters or pocket transmitters are available at option, e.g. TXS-821HT, TXS-820HSE, TXS-820LT or TXS-820SX.

Licence-free in the EU.

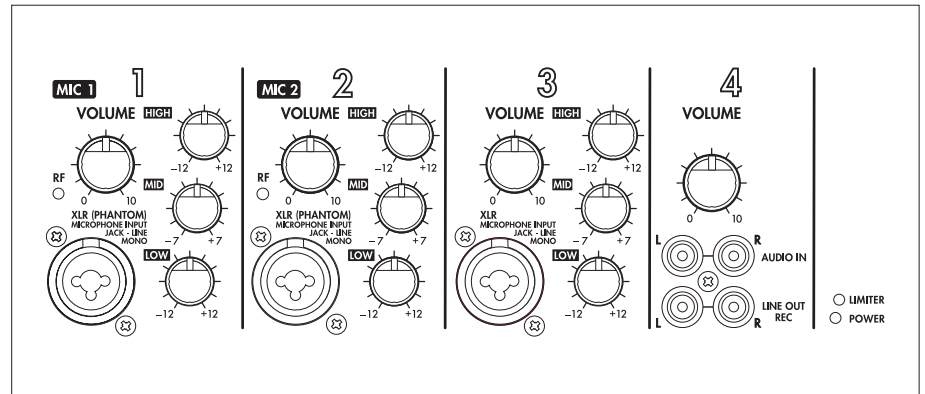

Model	SPEECH-200
Rated power ( $P_{RMS}$ )	75 W
Peak music power output	100 W
Frequency range	60-20,000 Hz
Carrier frequency	863.05 MHz
Operating range	≈ 25 m
Inputs	15 mV (mic 1), 5 mV (mic 2-3), 220 mV (line 1-3) 250 mV (line)
Equalizer, bass	±12 dB/60 Hz
Equalizer, midrange	±7 dB/1 kHz
Equalizer, treble	±12 dB/15 kHz
Power supply	~ 230 V/50 Hz/180 VA
Dimensions	540 x 1,140 x 430 mm
Weight	33 kg
Connections	3 x XLR (mic), 3 x 6.3 mm jack (line), 1 x RCA L/R (line in), 1 x RCA L/R (line out)

