



BEAMZ
MADE
EAZY

151.372 V1.1

BTS250C

QUICK START GUIDE

CONTROL MENU

Menu		Description		
DMX Addr	d001-d512		DMX address setting	
Mode	DMX	1 / 4 / 6 / 10 Ch	DMX channel mode	
	Auto	Program	001-005	Preset programs
		Speed	001-009	Programs speed
	Manual	Red	000-255	Dimmer 0-100%
		Green	000-255	
		Blue	000-255	
		White	000-255	
	Strobe	000-255	Strobe, slow to fast	
Dimmer	Curve	0.3-3.0	Dimmer curves adjustment	
	Mode	Standard		Select dimmer curve
		Stage		
		TV		
		Architecture		
		Theatre		
		Custom	Fade in (150ms-2230ms) Fade out (150ms-2230ms)	
Advance	Authorization	On / Off	Advanced settings for Beamz support only.	
	Signal priority	DMX	Signal priority setting	
	Signal hold	On / Off	Run if signal cut	
	RDM	On / Off	RDM function on / off	
	Screen Timeout	30sec.		Display shut off time
		Never		
Screen brightness	10-100%		Display brightness	
Reset	Yes / No		System reset	
Reverse	Yes / No		Display reverse 180°	

DMX CHANNELS

1 Channel

Channel	Function	Value	Description
1	Dimmer	000-255	Intensity 0-100%

4 Channel

Channel	Function	Value	Description
1	Red	000-255	Intensity 0-100%
2	Green	000-255	Intensity 0-100%
3	Blue	000-255	Intensity 0-100%
4	White	000-255	Intensity 0-100%

6 Channel


Channel	Function	Value	Description
1	Dimmer	000-255	Intensity 0-100%
2	Strobe	000-255	No function
		0005-255	Strobe, slow to fast
3	Red	000-255	Intensity 0-100%
4	Green	000-255	Intensity 0-100%
5	Blue	000-255	Intensity 0-100%
6	White	000-255	Intensity 0-100%

10 Channel

Channel	Function	Value	Description
1	Dimmer	000-255	Intensity 0-100%
2	Strobe	000-255	No function
		0005-255	Strobe, slow to fast
3	Red	000-255	Intensity 0-100%
4	Green	000-255	Intensity 0-100%
5	Blue	000-255	Intensity 0-100%
6	White	000-255	Intensity 0-100%
7	Colour temperature	000-004	No function
		005-040	2800K
		041-076	3089K
		077-112	3200K
		113-148	4200K
		149-184	5600K
		185-220	7600K
		221-255	8000K
8	Colour fading	000-004	No function
		005-255	Colour fading
9	Colour macro	000-004	No function
		005-130	Colour jump, slow to fast
		131-255	Colour fading, slow to fast
10	Dimmer mode	000-005	No function
		006-047	Standard mode
		048-089	Stage mode
		090-131	TV mode
		132-173	Architecture mode
		174-215	Theatre mode
		216-255	Custom mode

TECHNICAL SPECIFICATIONS

Rated voltage	: 100-240VAC, 50-60Hz, 2.1-1.0A
LED	: 250Watt
LED Colour	: Red, Green, Blue, White
Colour temperature	: 2800K - 8000K
Beam angle	: 18-36°
Illuminance	: 61.077lx
Flash rate	: 1-19Hz
DMX channels	: 1, 4, 6 and 10
Function	: DMX, RDM and manual
Dimensions per unit	: 745 x 294 x 294mm
Weight (per unit)	: 9.1 kg

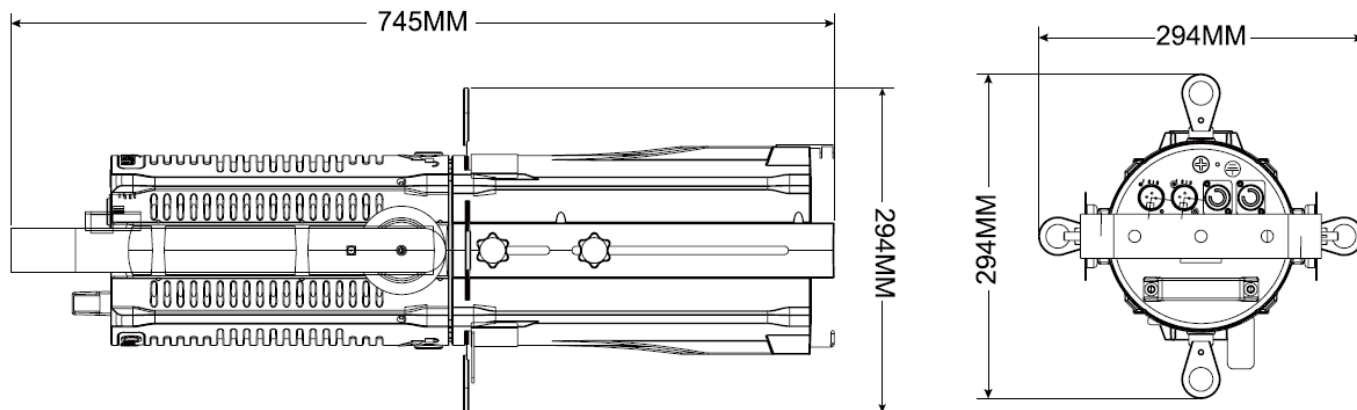

Design and product specifications are subject to change without prior notice.

European Union

Tronios B.V.,
Bedrijvenpark Twente Noord 18,
7602KR Almelo, The Netherlands

2014/35/EU
2014/30/EU
2011/65/EC



United Kingdom

Tronios Ltd.,
130 Harley Street,
London W1G 7JU, United Kingdom

S.I. 2016:1101
S.I. 2016:1091
S.I. 2012:3032





A series of horizontal dotted lines for writing, spanning the width of the page.



A series of horizontal dotted lines for writing, spanning the width of the page.



A series of horizontal dotted lines spanning the width of the page, intended for writing or drawing.



BEAMZ

**YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT**



offers a wide range of high performance lighting equipment and related accessories for the rental, entertainment and architectural lighting markets. BeamZ Pro stands for performance, innovation and value pricing!

